



MAGIC BUTTON

Swing gate motors MAGIC BUTTON® 5024



Application

The Magic Button 5024 range of swing gate motors are designed to provide the most simple and cost effective solution for domestic swing gates.

Power Range

The Magic Button 5024 range of swing gate motors have a traction force range of 400N-3000N with grease lubricated screw drive.

Australian Logic Controls

The Magic Button logic control units with on board software are designed, developed & assembled by Liftmaster in Australia for Australian conditions. The logic control is supplied with an Australian approved 24v board, transformer, and lead with 3 pin plug.



Secure Locking and a Simple Disconnect

The motor and gear unit can not be reversed under normal conditions, A keyed locking device is provided to put the motor into manual operation under power failure conditions.


Motor Travel Limits

Mechanical travel limits are located under the motor cover. Physical ground stops are also recommended in the open and closed position.

Warranty

The Magic Button 5024 operators have a 24 month warranty. (Subject to terms & conditions).

Magic Button 5024 Technical Specifications

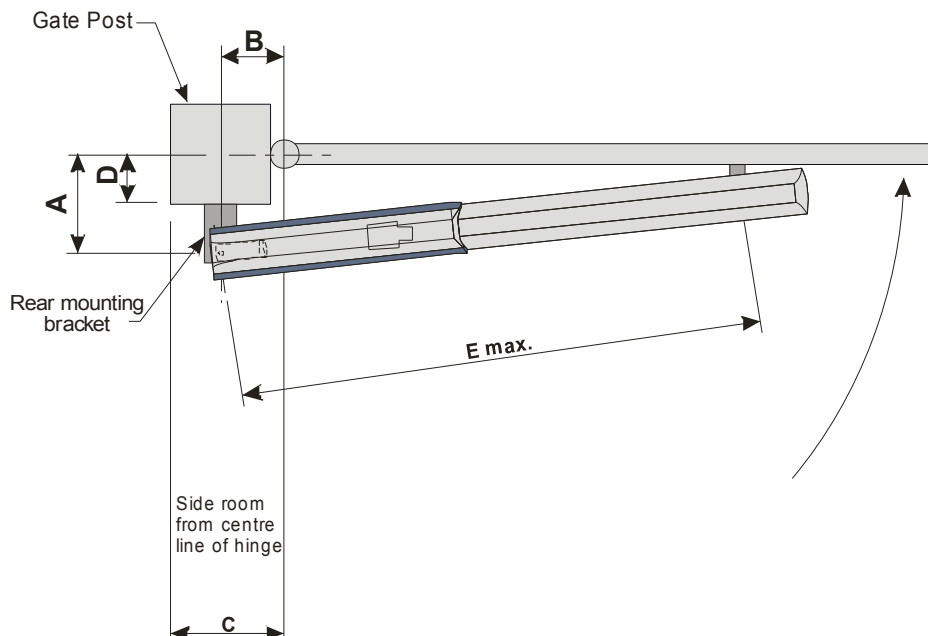

IMPORTANT NOTICE:

1. Ground stops in both open and closed positions as well as photo electric protection **MUST** be installed.
2. For outward opening gates contact Liftmaster.
3. For gates over 5m consult Liftmaster.
4. Gate lock is required on gates over 1.8m.
5. All operational specifications subject to on site wind loading and gate construction.

Table 1. Motor Specifications.

Magic Button Motor	Power supply	Current Amps	Max Power (W)	Duty cycle	Max. open angle	Max. leaf width	Travel time (sec)	IP rating	Temp. Range C°	Thrust force
5024 short	24v	10 max	110	intensive	120°	3m	variable	54	-20/ + 55	400 – 3000 N
5024	24v	10 max	120	intensive	130°	5m	variable	54	-20/ + 55	400 – 3000 N

Table 2. Installation Data for 90°

Motor	A	B	C	D *2	E
5024 short	130	130	250	60 max *3	720
5024	200	200	250	120 max *3	920

Table 3. Installation Data for 120/130°

Motor	A	B	C	D *2	E
5024 short	110	130	250	60 max *3	720
5024	140	200	250	70 max *3	920

*1 Travel time on 24v motor on gates over 1.5m should be increased to slow travel speed. Ref MB226 manual.

*2 If dimension "D" is greater than in tables 1 or 2 refer to our harmonic arm ART motor.

*3 For gates opening greater than 90° dimension "D" will reduce, subject to hinge position.

NSW

Sydney (02) 9699 9654
Wollongong (02) 4256 4247

VICTORIA

QUEENSLAND

Brisbane (07) 3849 6666
Gold Coast (07) 5596 4795